

FINGERTEC WORLDWIDE SDN BHD

H2i

H2i

Prepared for :

FINGERTEC WORLDWIDE SDN BHD

NO. 6, 8 & 10 JALAN BK 3/2, BANDAR KINRARA PUCHONG
47180 SELANGOR

Prepared By :

Shenzhen TCT Testing Technology Co., Ltd.

1F, No.1 Building, Yibaolai Industrial Park, No.1 Chongqing
Road, Qiaotou Village, Fuyong Town, Baoan District, Shenzhen

Date of Test:

Mar.12, 2014 to Mar.21, 2014

Date of Report:

Mar.21, 2014

Report Number:

TCT140319003S1-1

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen TCT Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen TCT Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TEST Report

IEC 60950-1: 2005+A1: 2009+A2:2013

Information technology equipment – Safety –

Part 1: General requirements

Report reference No TCT140319003S1-1

Tested by (+ signature) Abel Chen

Approved by (+ signature) Jack Zhang

Date of issue Mar.21, 2014



Testing Laboratory Name Shenzhen TCT Testing Technology Co., Ltd.

Address 1F, No.1 Building, Yibaolai Industrial Park, No.1 Chongqing Road,
Qiaotou Village, Fuyong Town, Baoan District, Shenzhen

Testing location CBTL ☐ CCATL ☐ SMT ☐ TMP ☐

Address Same as above.

Applicant's Name FINGERTEC WORLDWIDE SDN BHD

Address NO. 6, 8 & 10 JALAN BK 3/2, BANDAR KINRARA PUCHONG
47180 SELANGOR

Standard IEC 60950-1: 2005+A1: 2009+A2:2013

Test procedure N/A

Procedure deviation N/A.

Non-standard test method N/A.

Test item description H2i

Manufacturer name FINGERTEC WORLDWIDE SDN BHD

Manufacturer address NO. 6, 8 & 10 JALAN BK 3/2, BANDAR KINRARA PUCHONG
47180 SELANGOR

Trademark FINGERTEC

Model and/or type reference H2i

Rating(s) 12V \Rightarrow 3000mA (For SWITCHING POWER SUPPLY I/P:100-240V~
50/60Hz 0.9A Max, O/P: 12V \Rightarrow 3000mA)

Test item particulars :

Equipment mobility : Stationary equipment
 Operating condition : Continuous
 Tested for IT power systems : N/A
 IT testing, phase-phase voltage (V) : N/A
 Class of equipment : Class III
 Protection against ingress of water : IPX0

Test case verdicts:

Test case does not apply to the test object..... : N(/A.)
 Test item does meet the requirement..... : P(ass)
 Test item does not meet the requirement..... : F(ail)


Testing:

Date of receipt of test item Mar.11, 2014
 Date(s) of performance of test Mar.12, 2014 to Mar.21, 2014

Model List

| Model List: | |
|----------------------------------|---------------------------|
| Rating | 12V $\overline{=}$ 3000mA |
| Test Model | H2i |
| Other Models | N/A |
| All tests are carried out on H2i | |

Label

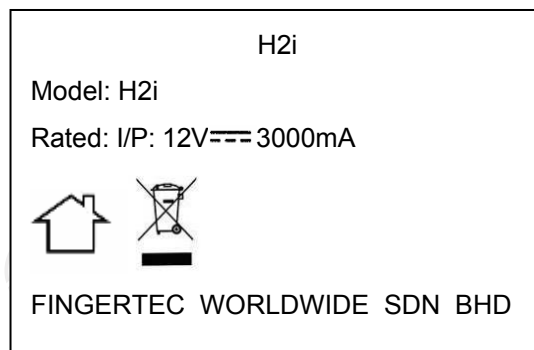

Note:

1. The height of graphical symbols shall not be less than 5 mm;
2. The height of letters and numerals shall not be less than 2 mm;
3. The main rating label was attached in enclosure,

General remarks:

"(see remark #)" refers to a remark appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a comma is used as the decimal separator.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced except in full without the written approval of the testing laboratory.

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Unless otherwise specified, test are made under normal conditions at an ambient temperature within the range of 15°C to 35°C, RH45% to 75% and an air pressure of 860mbar of 1060mbar

Attachment with:

- 1) Equipment list
- 2) Photo documentation

| IEC 60950-1 | | | |
|-------------|--|---|----------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 1 | GENERAL | | |
| 1.5 | Components | | P |
| 1.5.1 | General | | P |
| | Comply with IEC 60950 or relevant component standard | Components, which were found to affect safety aspects comply with the requirements of this aspects of the relevant IEC component standards. (See appended table 1.5.1) | P |
| 1.5.2 | Evaluation and testing of components | Components, which are certified to IEC or national standards, are applied correctly within their ratings. Components not covered by IEC standards are tested under the conditions present in the equipment. | P |
| 1.5.3 | Thermal controls | No thermal controls provided | N/A |
| 1.5.4 | Transformers | | N/A |
| 1.5.5 | Interconnecting cables | | P |
| 1.5.6 | Capacitors bridging insulation | | N/A |
| 1.5.7 | Resistors bridging insulation | | N/A |
| 1.5.7.1 | Resistors bridging functional, basic or supplementary insulation | | N/A |
| 1.5.7.2 | Resistors bridging double or reinforced insulation between a.c. mains and other circuits | | N/A |
| 1.5.7.3 | Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable | | N/A |
| 1.5.8 | Components in equipment for IT power systems | | N/A |
| 1.5.9 | Surge suppressors | | N/A |
| 1.5.9.1 | General | | N/A |
| 1.5.9.2 | Protection of VDRs | | N/A |
| 1.5.9.3 | Bridging of functional insulation by a VDR | | N/A |
| 1.5.9.4 | Bridging of basic insulation by a VDR | | N/A |
| 1.5.9.5 | Bridging of supplementary, double or reinforced insulation by a VDR | | N/A |
| 1.6 | Power interface | | |
| 1.6.1 | AC power distribution systems | Connection to TN power system | N/A |

| IEC 60950-1 | | | |
|-------------|--------------------------------------|---------------------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 1.6.2 | Input current | See appended table 1.6.2. | P |
| 1.6.3 | Voltage limit of hand-held equipment | | N/A |
| 1.6.4 | Neutral conductor | Class III equipment | N/A |

| | | | |
|------------|---|---|-----|
| 1.7 | Marking and instructions | | |
| 1.7.1 | Power rating | All relevant markings are provided on a label. | P |
| | Rated voltage(s) or voltage range(s) (V): | DC 12V | P |
| | Symbol for nature of supply, for d.c. only: | — | P |
| | Rated frequency or rated frequency range (Hz) | | N/A |
| | Rated current (mA or A) : | 3.0A | P |
| | Manufacturer's name or trade-mark or identification mark : | FINGERTEC | P |
| | Model identification or type reference : | H2i | P |
| | Symbol for Class II equipment only : | Class III equipment | N/A |
| | Other markings and symbols : | See copy of marking plate | P |
| 1.7.2 | Safety instructions and marking | See user manual | P |
| 1.7.2.1 | General | | P |
| 1.7.2.2 | Disconnect devices | No such device | N/A |
| 1.7.2.3 | Overcurrent protective device | | N/A |
| 1.7.2.4 | IT power distribution systems | | N/A |
| 1.7.2.5 | Operator access with a tool | | N/A |
| 1.7.2.6 | Ozone | | N/A |
| 1.7.3 | Short duty cycles | Equipment is designed for continuous operation. | N/A |
| 1.7.4 | Supply voltage adjustment | Input not adjustable. | N/A |
| | Methods and means of adjustment; reference to installation instructions | | N/A |
| 1.7.5 | Power outlets on the equipment: | | N/A |
| 1.7.6 | Fuse identification (marking, special fusing characteristics, cross-reference): | | N/A |
| 1.7.7 | Wiring terminals | See below. | N/A |
| 1.7.7.1 | Protective earthing and bonding terminals: | | N/A |
| 1.7.7.2 | Terminals for a.c. mains supply conductors | | N/A |
| 1.7.7.3 | Terminals for d.c. mains supply conductors | | N/A |

| IEC 60950-1 | | | |
|-------------|--|--------------------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 1.7.8 | Controls and indicators | LEDs as indicators | P |
| 1.7.8.1 | Identification, location and marking | On the enclosure | P |
| 1.7.8.2 | Colours | | P |
| 1.7.8.3 | Symbols according to IEC 60417 | | N/A |
| 1.7.8.4 | Markings using figures | | N/A |
| 1.7.9 | Isolation of multiple power sources | | N/A |
| 1.7.10 | Thermostats and other regulating devices | No such components. | N/A |
| 1.7.11 | Durability | | P |
| 1.7.12 | Removable parts | | N/A |
| 1.7.13 | Replaceable batteries : | No Replaceable batteries | N/A |
| | Language(s) : | English | — |
| 1.7.14 | Equipment for restricted access locations: | | N/A |

| | | | |
|------------|--|--|------------|
| 2 | PROTECTION FROM HAZARDS | | P |
| 2.1 | Protection from electric shock and energy hazards | | N/A |
| 2.1.1 | Protection in operator access areas | Class III equipment no hazards accessed, | N/A |
| 2.1.1.1 | Access to energized parts | Operator can not touch the hazardous energized parts | N/A |
| | Test by inspection : | | N/A |
| | Test with test finger (Figure 2A): | | N/A |
| | Test with test pin (Figure 2B) : | | N/A |
| | Test with test probe (Figure 2C) : | | N/A |
| 2.1.1.2 | Battery compartments | | N/A |
| 2.1.1.3 | Access to ELV wiring | | N/A |
| | Working voltage (V _{peak} or V _{rms}); minimum distance through insulation (mm) | | — |
| 2.1.1.4 | Access to hazardous voltage circuit wiring | No hazardous voltage wiring in operator accessible area. | N/A |
| 2.1.1.5 | Energy hazards: | There is no energy hazards | N/A |
| 2.1.1.6 | Manual controls | | N/A |
| 2.1.1.7 | Discharge of capacitors in equipment | | N/A |
| | Measured voltage (V); time-constant (s): | | — |
| 2.1.1.8 | Energy hazards – d.c. mains supply | | N/A |
| | a) Capacitor connected to the d.c. mains supply | | N/A |

| IEC 60950-1 | | | |
|-------------|--|---|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | b) Internal battery connected to the d.c. mains supply : | | N/A |
| 2.1.1.9 | Audio amplifiers: | See cl. 2.1.1.1 | P |
| 2.1.2 | Protection in service access areas | No service access area. | N/A |
| 2.1.3 | Protection in restricted access locations | The unit is not limited to be used in restricted access locations | N/A |

| | | | |
|------------|---|---|---|
| 2.2 | SELV circuits | | |
| 2.2.1 | General requirements | Input is SELV voltage | P |
| 2.2.2 | Voltages under normal conditions (V) | ≤42.4V Peak or 60 V d.c | P |
| 2.2.3 | Voltages under fault conditions (V) | ≤42.4V Peak or 60 V d.c and 71Vpeak or 120V d.c(0.2s) | P |
| 2.2.4 | Connection of SELV circuits to other circuits | | P |

| | | | |
|------------|--|-----------------|-----|
| 2.3 | TNV circuits | | |
| 2.3.1 | Limits | No TNV circuits | N/A |
| | Type of TNV circuits: | | — |
| 2.3.2 | Separation from other circuits and from accessible parts | | N/A |
| 2.3.2.1 | General requirements | | N/A |
| 2.3.2.2 | Protection by basic insulation | | N/A |
| 2.3.2.3 | Protection by earthing | | N/A |
| 2.3.2.4 | Protection by other constructions: | | N/A |
| 2.3.3 | Separation from hazardous voltages | | N/A |
| | Insulation employed: | | — |
| 2.3.4 | Connection of TNV circuits to other circuits | | N/A |
| | Insulation employed: | | — |
| 2.3.5 | Test for operating voltages generated externally | | N/A |

| | | | |
|------------|---------------------------------|--|-----|
| 2.4 | Limited current circuits | | |
| 2.4.1 | General requirements | | N/A |
| 2.4.2 | Limit values | | N/A |
| | Frequency (Hz): | | — |
| | Measured current (mA): | | — |

| IEC 60950-1 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | Measured voltage (V) : | | — |
| | Measured circuit capacitance (nF or μ F): | | — |
| 2.4.3 | Connection of limited current circuits to other circuits | | N/A |

| | | | |
|------------|--|------------------------------------|------------|
| 2.5 | Limited power sources | | N/A |
| | a) Inherently limited output | The adapter accord LPS requirement | N/A |
| | b) Impedance limited output | | N/A |
| | c) Regulating network limited output under normal operating and single fault condition | | N/A |
| | d) Overcurrent protective device limited output | | N/A |
| | Max. output voltage (V), max. output current (A), max. apparent power (VA): | | — |
| | Current rating of overcurrent protective device (A) | | — |
| | Use of integrated circuit (IC) current limiters | (See Annex CC) | — |

| | | | |
|------------|--|---------------------|------------|
| 2.6 | Provisions for earthing and bonding | | N/A |
| 2.6.1 | Protective earthing | Class III equipment | N/A |
| 2.6.2 | Functional earthing | | N/A |
| 2.6.3 | Protective earthing and protective bonding conductors | | N/A |
| 2.6.3.1 | General | | N/A |
| 2.6.3.2 | Size of protective earthing conductors | | N/A |
| | Rated current (A), cross-sectional area (mm ²), AWG: | | — |
| 2.6.3.3 | Size of protective bonding conductors | | N/A |
| | Rated current (A), cross-sectional area (mm ²), AWG: | | — |
| 2.6.3.4 | Resistance of earthing conductors and their terminations; resistance (Ω), voltage drop (V), test current (A), duration (min): | | N/A |
| 2.6.3.5 | Colour of insulation: | | N/A |
| 2.6.4 | Terminals | | N/A |
| 2.6.4.1 | General | | N/A |
| 2.6.4.2 | Protective earthing and bonding terminals | | N/A |

| IEC 60950-1 | | | |
|-------------|--|----------------------|------------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | Rated current (A), type, nominal thread diameter (mm): | | — |
| 2.6.4.3 | Separation of the protective earthing conductor from protective bonding conductors | | N/A |
| 2.6.5 | Integrity of protective earthing | | N/A |
| 2.6.5.1 | Interconnection of equipment | | N/A |
| 2.6.5.2 | Components in protective earthing conductors and protective bonding conductors | | N/A |
| 2.6.5.3 | Disconnection of protective earth | | N/A |
| 2.6.5.4 | Parts that can be removed by an operator | | N/A |
| 2.6.5.5 | Parts removed during servicing | | N/A |
| 2.6.5.6 | Corrosion resistance | | N/A |
| 2.6.5.7 | Screws for protective bonding | | N/A |
| 2.6.5.8 | Reliance on telecommunication network or cable distribution system | | N/A |
| 2.7 | Overcurrent and earth fault protection in primary circuits | | N/A |
| 2.7.1 | Basic requirements | | N/A |
| | Instructions when protection relies on building installation | | N/A |
| 2.7.2 | Faults not simulated in 5.3.7 | | N/A |
| 2.7.3 | Short-circuit backup protection | | N/A |
| 2.7.4 | Number and location of protective devices: | | N/A |
| 2.7.5 | Protection by several devices | | N/A |
| 2.7.6 | Warning to service personnel: | | N/A |
| 2.8 | Safety interlocks | | N/A |
| 2.8.1 | General principles | No safety interlocks | N/A |
| 2.8.2 | Protection requirements | | N/A |
| 2.8.3 | Inadvertent reactivation | | N/A |
| 2.8.4 | Fail-safe operation | | N/A |
| 2.8.5 | Moving parts | | N/A |
| 2.8.6 | Overriding | | N/A |
| 2.8.7 | Switches and relays | | N/A |
| 2.8.7.1 | Contact gaps (mm) : | | N/A |

| IEC 60950-1 | | | |
|-------------|------------------------|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 2.8.7.2 | Overload test | | N/A |
| 2.8.7.3 | Endurance test | | N/A |
| 2.8.7.4 | Electric strength test | | N/A |
| 2.8.8 | Mechanical actuators | | N/A |

| | | | |
|------------|--|---|----------|
| 2.9 | Electrical insulation | | P |
| 2.9.1 | Properties of insulating materials | Not used: rubber, asbestos or hygroscopic materials | P |
| 2.9.2 | Humidity conditioning | (see appended table 2.9.2) | P |
| | Relative humidity (%), temperature (°C): | 91-95%; 25°C | — |
| 2.9.3 | Grade of insulation | Functional insulation | P |
| 2.9.4 | Separation from hazardous voltages | | N/A |
| | Method(s) used : | | — |

| | | | |
|-------------|--|----------------------------|------------|
| 2.10 | Clearances, creepage distances and distances through insulation | | N/A |
| 2.10.1 | General | functional insulation only | N/A |
| 2.10.1.1 | Frequency : | | N/A |
| 2.10.1.2 | Pollution degrees : | | N/A |
| 2.10.1.3 | Reduced values for functional insulation | | N/A |
| 2.10.1.4 | Intervening unconnected conductive parts | | N/A |
| 2.10.1.5 | Insulation with varying dimensions | | N/A |
| 2.10.1.6 | Special separation requirements | | N/A |
| 2.10.1.7 | Insulation in circuits generating starting pulses | | N/A |
| 2.10.2 | Determination of working voltage | | N/A |
| 2.10.2.1 | General | | N/A |
| 2.10.2.2 | RMS working voltage | | N/A |
| 2.10.2.3 | Peak working voltage | | N/A |
| 2.10.3 | Clearances | | N/A |
| 2.10.3.1 | General | | N/A |
| 2.10.3.2 | Mains transient voltages | | N/A |
| | a) AC mains supply: | | N/A |
| | b) Earthed d.c. mains supplies: | | N/A |
| | c) Unearthed d.c. mains supplies: | | N/A |
| | d) Battery operation: | | N/A |

| IEC 60950-1 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 2.10.3.3 | Clearances in primary circuits | | N/A |
| 2.10.3.4 | Clearances in secondary circuits | | N/A |
| 2.10.3.5 | Clearances in circuits having starting pulses | | N/A |
| 2.10.3.6 | Transients from a.c. mains supply: | | N/A |
| 2.10.3.7 | Transients from d.c. mains supply: | | N/A |
| 2.10.3.8 | Transients from telecommunication networks and cable distribution systems: | | N/A |
| 2.10.3.9 | Measurement of transient voltage levels | | N/A |
| | a) Transients from a mains supply | | N/A |
| | For an a.c. mains supply: | | N/A |
| | For a d.c. mains supply: | | N/A |
| | b) Transients from a telecommunication network : | | N/A |
| 2.10.4 | Creepage distances | | N/A |
| 2.10.4.1 | General | | N/A |
| 2.10.4.2 | Material group and comparative tracking index | | N/A |
| | CTI tests: | | — |
| 2.10.4.3 | Minimum creepage distances | | N/A |
| 2.10.5 | Solid insulation | | N/A |
| 2.10.5.1 | General | | N/A |
| 2.10.5.2 | Distances through insulation | | N/A |
| 2.10.5.3 | Insulating compound as solid insulation | | N/A |
| 2.10.5.4 | Semiconductor devices | | N/A |
| 2.10.5.5 | Cemented joints | | N/A |
| 2.10.5.6 | Thin sheet material – General | | N/A |
| 2.10.5.7 | Separable thin sheet material | | N/A |
| | Number of layers (pcs): | | — |
| 2.10.5.8 | Non-separable thin sheet material | | N/A |
| 2.10.5.9 | Thin sheet material – standard test procedure | | N/A |
| | Electric strength test | | — |
| 2.10.5.10 | Thin sheet material – alternative test procedure | | N/A |
| | Electric strength test | | — |
| 2.10.5.11 | Insulation in wound components | | N/A |
| 2.10.5.12 | Wire in wound components | | N/A |
| | Working voltage : | | N/A |

| IEC 60950-1 | | | |
|-------------|---|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | a) Basic insulation not under stress: | | N/A |
| | b) Basic, supplementary, reinforced insulation : | | N/A |
| | c) Compliance with Annex U : | | N/A |
| | Two wires in contact inside wound component; angle between 45° and 90° : | | -- |
| 2.10.5.13 | Wire with solvent-based enamel in wound components | | N/A |
| | Electric strength test | | — |
| | Routine test | | N/A |
| 2.10.5.14 | Additional insulation in wound components | | N/A |
| | Working voltage : | | N/A |
| | - Basic insulation not under stress: | | N/A |
| | - Supplementary, reinforced insulation: | | N/A |
| 2.10.6 | Construction of printed boards | | N/A |
| 2.10.6.1 | Uncoated printed boards | | N/A |
| 2.10.6.2 | Coated printed boards | | N/A |
| 2.10.6.3 | Insulation between conductors on the same inner surface of a printed board | | N/A |
| 2.10.6.4 | Insulation between conductors on different layers of a printed board | | N/A |
| | Distance through insulation | | N/A |
| | Number of insulation layers (pcs): | | N/A |
| 2.10.7 | Component external terminations | | N/A |
| 2.10.8 | Tests on coated printed boards and coated components | | N/A |
| 2.10.8.1 | Sample preparation and preliminary inspection | | N/A |
| 2.10.8.2 | Thermal conditioning | | N/A |
| 2.10.8.3 | Electric strength test | | N/A |
| 2.10.8.4 | Abrasion resistance test | | N/A |
| 2.10.9 | Thermal cycling | | N/A |
| 2.10.10 | Test for Pollution Degree 1 environment and insulating compound | | N/A |
| 2.10.11 | Tests for semiconductor devices and cemented joints | | N/A |
| 2.10.12 | Enclosed and sealed parts | | N/A |

| | | |
|----------|---------------------------------------|----------|
| 3 | WIRING, CONNECTIONS AND SUPPLY | P |
|----------|---------------------------------------|----------|

| IEC 60950-1 | | | |
|-------------|--|--|----------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 3.1 | General | | P |
| 3.1.1 | Current rating and overcurrent protection | | P |
| 3.1.2 | Protection against mechanical damage | | P |
| 3.1.3 | Securing of internal wiring | | P |
| 3.1.4 | Insulation of conductors | Insulation on internal conductors is considered to be of adequate quality and suitable for the application and the working voltage involved. | P |
| 3.1.5 | Beads and ceramic insulators | | N/A |
| 3.1.6 | Screws for electrical contact pressure | No screws used to provide electrical contact pressure. | N/A |
| 3.1.7 | Insulating materials in electrical connections | Not used. | N/A |
| 3.1.8 | Self-tapping and spaced thread screws | | N/A |
| 3.1.9 | Termination of conductors | | N/A |
| | 10 N pull test | | N/A |
| 3.1.10 | Sleeving on wiring | | N/A |

| | | | |
|------------|---|--|------------|
| 3.2 | Connection to a mains supply | | N/A |
| 3.2.1 | Means of connection | Class III equipment, connected to mains supply by approved adapter | N/A |
| 3.2.1.1 | Connection to an a.c. mains supply | | N/A |
| 3.2.1.2 | Connection to a d.c. mains supply | | N/A |
| 3.2.2 | Multiple supply connections | | N/A |
| 3.2.3 | Permanently connected equipment | | N/A |
| | Number of conductors, diameter of cable and conduits (mm) : | | — |
| 3.2.4 | Appliance inlets | | N/A |
| 3.2.5 | Power supply cords | | N/A |
| 3.2.5.1 | AC power supply cords | | N/A |
| | Type : | | — |
| | Rated current (A), cross-sectional area (mm ²), AWG : | | — |
| 3.2.5.2 | DC power supply cords | | N/A |
| 3.2.6 | Cord anchorages and strain relief | | N/A |

| IEC 60950-1 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | Mass of equipment (kg), pull (N) : | | — |
| | Longitudinal displacement (mm) : | | — |
| 3.2.7 | Protection against mechanical damage | | N/A |
| 3.2.8 | Cord guards | | N/A |
| | Diameter or minor dimension D (mm); test mass (g): | | — |
| | Radius of curvature of cord (mm): | | — |
| 3.2.9 | Supply wiring space | | N/A |

| | | | |
|------------|---|--|-----|
| 3.3 | Wiring terminals for connection of external conductors | | |
| 3.3.1 | Wiring terminals | | N/A |
| 3.3.2 | Connection of non-detachable power supply cords | | N/A |
| 3.3.3 | Screw terminals | | N/A |
| 3.3.4 | Conductor sizes to be connected | | N/A |
| | Rated current (A), cord/cable type, cross-sectional area (mm ²) : | | — |
| 3.3.5 | Wiring terminal sizes | | N/A |
| | Rated current (A), type, nominal thread diameter (mm) : | | — |
| 3.3.6 | Wiring terminal design | | N/A |
| 3.3.7 | Grouping of wiring terminals | | N/A |
| 3.3.8 | Stranded wire | | N/A |

| | | | |
|------------|---|--|-----|
| 3.4 | Disconnection from the mains supply | | |
| 3.4.1 | General requirement | Class III equipment, connected to mains supply by approved adapter | N/A |
| 3.4.2 | Disconnect devices | | N/A |
| 3.4.3 | Permanently connected equipment | | N/A |
| 3.4.4 | Parts which remain energized | | N/A |
| 3.4.5 | Switches in flexible cords | | N/A |
| 3.4.6 | Number of poles-single-phase and d.c. equipment | | N/A |
| 3.4.7 | Number of poles-three-phase equipment | | N/A |
| 3.4.8 | Switches as disconnect devices | | N/A |
| 3.4.9 | Plugs as disconnect devices | | N/A |

| IEC 60950-1 | | | |
|-------------|--------------------------|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 3.4.10 | Interconnected equipment | | N/A |
| 3.4.11 | Multiple power sources | | N/A |

| | | | |
|------------|--|-------------------|----------|
| 3.5 | Interconnection of equipment | | P |
| 3.5.1 | General requirements | | P |
| 3.5.2 | Types of interconnection circuits: | Only SELV circuit | P |
| 3.5.3 | ELV circuits as interconnection circuits | | N/A |
| 3.5.4 | Data ports for additional equipment | | P |

| | | | |
|------------|------------------------------|--|-----|
| 4 | PHYSICAL REQUIREMENTS | | |
| 4.1 | Stability | | |
| | Angle of 10° | | N/A |
| | Test force (N) : | | N/A |

| | | | |
|------------|--|---|----------|
| 4.2 | Mechanical strength | | P |
| 4.2.1 | General | | P |
| 4.2.2 | Steady force test, 10 N | No hazard, ref. comment in appended table 2.10.3, 2.10.4. | P |
| 4.2.3 | Steady force test, 30 N | | N/A |
| 4.2.4 | Steady force test, 250 N | | P |
| 4.2.5 | Impact test | Steel ball impact | N/A |
| | Fall test | | N/A |
| | Swing test | | N/A |
| 4.2.6 | Drop test; height (mm) : | | P |
| 4.2.7 | Stress relief test | | N/A |
| 4.2.8 | Cathode ray tubes | | N/A |
| | Picture tube separately certified : | | N/A |
| 4.2.9 | High pressure lamps | | N/A |
| 4.2.10 | Wall or ceiling mounted equipment; force (N) : | | N/A |

| | | | |
|------------|---|----------------------------------|-----|
| 4.3 | Design and construction | | |
| 4.3.1 | Edges and corners | Round or Smooth | P |
| 4.3.2 | Handles and manual controls; force (N): | No handle or manual control used | N/A |

| IEC 60950-1 | | | |
|-------------|---|---|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 4.3.3 | Adjustable controls | No adjustable controls. | N/A |
| 4.3.4 | Securing of parts | | N/A |
| 4.3.5 | Connection by plugs and sockets | | N/A |
| 4.3.6 | Direct plug-in equipment | | N/A |
| | Torque | | — |
| | Compliance with the relevant mains plug standard | | N/A |
| 4.3.7 | Heating elements in earthed equipment | No heating elements provided. | N/A |
| 4.3.8 | Batteries | (see appended table 4.3.8) | N/A |
| | - Overcharging of a rechargeable battery | | N/A |
| | - Unintentional charging of a non-rechargeable battery | | N/A |
| | - Reverse charging of a rechargeable battery | | N/A |
| | - Excessive discharging rate for any battery | | N/A |
| 4.3.9 | Oil and grease | Insulation in intended use not considered to be exposed to oil or grease. | N/A |
| 4.3.10 | Dust, powders, liquids and gases | Equipment in intended use not considered to be exposed to these substances. | N/A |
| 4.3.11 | Containers for liquids or gases | No container for liquids or gases provided. | N/A |
| 4.3.12 | Flammable liquids | No flammable liquids provided. | N/A |
| | Quantity of liquid (l) : | | -- |
| | Flash point (°C) : | | -- |
| 4.3.13 | Radiation | | N/A |
| 4.3.13.1 | General | | N/A |
| 4.3.13.2 | Ionizing radiation | | N/A |
| | Measured radiation (pA/kg) : | | — |
| | Measured high-voltage (kV) : | | — |
| | Measured focus voltage (kV): | | — |
| | CRT markings : | | — |
| 4.3.13.3 | Effect of ultraviolet (UV) radiation on materials | UV radiation. | N/A |
| | Part, property, retention after test, flammability classification : | | -- |
| 4.3.13.4 | Human exposure to ultraviolet (UV) radiation : | | N/A |

| IEC 60950-1 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 4.3.13.5 | Lasers (including laser diodes) and LEDs | | N/A |
| 4.3.13.5.1 | Lasers (including laser diodes) | | N/A |
| | Laser class: | | — |
| 4.3.13.5.2 | Light emitting diodes (LEDs) | | N/A |
| 4.3.13.6 | Other types: | | N/A |

| | | | |
|------------|--|--|------------|
| 4.4 | Protection against hazardous moving parts | | N/A |
| 4.4.1 | General | | N/A |
| 4.4.2 | Protection in operator access areas: | | N/A |
| 4.4.3 | Protection in restricted access locations: | | N/A |
| 4.4.4 | Protection in service access areas | | N/A |

| | | | |
|------------|------------------------------------|--------------------------|----------|
| 4.5 | Thermal requirements | | P |
| 4.5.1 | General | | P |
| 4.5.2 | Temperature tests | | P |
| | Normal load condition per Annex L: | | — |
| 4.5.3 | Temperature limits for materials | (see appended table 4.5) | P |
| 4.5.4 | Touch temperature limits | (see appended table 4.5) | P |
| 4.5.5 | Resistance to abnormal heat : | | N/A |

| | | | |
|------------|--|--|-----|
| 4.6 | Openings in enclosures | | |
| 4.6.1 | Top and side openings | | N/A |
| | Dimensions (mm) | | — |
| 4.6.2 | Bottoms of fire enclosures | | N/A |
| | Construction of the bottom, dimensions (mm) | | — |
| 4.6.3 | Doors or covers in fire enclosures | | N/A |
| 4.6.4 | Openings in transportable equipment | | N/A |
| 4.6.4.1 | Constructional design measures | | N/A |
| | Dimensions (mm) | | — |
| 4.6.4.2 | Evaluation measures for larger openings | | N/A |
| 4.6.4.3 | Use of metallized parts | | N/A |
| 4.6.5 | Adhesives for constructional purposes | | N/A |
| | Conditioning temperature (°C), time (weeks): | | — |

| IEC 60950-1 | | | |
|-------------|--------------------|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |

| | | | |
|------------|--|-----------------------|----------|
| 4.7 | Resistance to fire | | P |
| 4.7.1 | Reducing the risk of ignition and spread of flame | | P |
| | Method 1, selection and application of components wiring and materials | | P |
| | Method 2, application of all of simulated fault condition tests | | N/A |
| 4.7.2 | Conditions for a fire enclosure | | P |
| 4.7.2.1 | Parts requiring a fire enclosure | | N/A |
| 4.7.2.2 | Parts not requiring a fire enclosure | | N/A |
| 4.7.3 | Materials | | P |
| 4.7.3.1 | General | | P |
| 4.7.3.2 | Materials for fire enclosures | Plastic enclosure,V-1 | P |
| 4.7.3.3 | Materials for components and other parts outside fire enclosures | | N/A |
| 4.7.3.4 | Materials for components and other parts inside fire enclosures | PCB | P |
| 4.7.3.5 | Materials for air filter assemblies | | N/A |
| 4.7.3.6 | Materials used in high-voltage components | | N/A |

| | | | |
|------------|--|--|------------|
| 5 | ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS | | P |
| 5.1 | Touch current and protective conductor current | | N/A |
| 5.1.1 | General | | N/A |
| 5.1.2 | Configuration of equipment under test (EUT) | | N/A |
| 5.1.2.1 | Single connection to an a.c. mains supply | | N/A |
| 5.1.2.2 | Redundant multiple connections to an a.c. mains supply | | N/A |
| 5.1.2.3 | Simultaneous multiple connections to an a.c. mains supply | | N/A |
| 5.1.3 | Test circuit | | N/A |
| 5.1.4 | Application of measuring instrument | | N/A |
| 5.1.5 | Test procedure | | N/A |
| 5.1.6 | Test measurements | | N/A |
| | Supply voltage (V) : | | — |
| | Measured touch current (mA) : | | — |
| | Max. allowed touch current (mA) : | | — |
| | Measured protective conductor current (mA) : | | — |

| IEC 60950-1 | | | |
|-------------|---|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | Max. allowed protective conductor current (mA) | | — |
| 5.1.7 | Equipment with touch current exceeding 3,5 mA | | N/A |
| 5.1.7.1 | General : | | N/A |
| 5.1.7.2 | Simultaneous multiple connections to the supply | | N/A |
| 5.1.8 | Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks | | N/A |
| 5.1.8.1 | Limitation of the touch current to a telecommunication network or to a cable distribution system | | N/A |
| | Supply voltage (V) : | | — |
| | Measured touch current (mA) : | | — |
| | Max. allowed touch current (mA) : | | — |
| 5.1.8.2 | Summation of touch currents from telecommunication networks | | N/A |
| | a) EUT with earthed telecommunication ports : | | N/A |
| | b) EUT whose telecommunication ports have no reference to protective earth | | N/A |

| | | | |
|------------|--------------------------|---------------------|------------|
| 5.2 | Electric strength | | N/A |
| 5.2.1 | General | Class III equipment | N/A |
| 5.2.2 | Test procedure | | N/A |

| | | | |
|------------|---|--|----------|
| 5.3 | Abnormal operating and fault conditions | | P |
| 5.3.1 | Protection against overload and abnormal operation | | P |
| 5.3.2 | Motors | | N/A |
| 5.3.3 | Transformers | | N/A |
| 5.3.4 | Functional insulation : | | P |
| 5.3.5 | Electromechanical components | | N/A |
| 5.3.6 | Audio amplifiers in ITE : | | P |
| 5.3.7 | Simulation of faults | | P |
| 5.3.8 | Unattended equipment | | N/A |
| 5.3.9 | Compliance criteria for abnormal operating and fault conditions | | P |

| IEC 60950-1 | | | |
|-------------|--------------------|--|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 5.3.9.1 | During the tests | No fire or molten metal occurred and no deformation of enclosure during the tests. | P |
| 5.3.9.2 | After the tests | No fire or molten metal occurred and no deformation of enclosure after the tests. | P |

| | | | |
|------------|--|--------------------------|------------|
| 6 | CONNECTION TO TELECOMMUNICATION NETWORKS | | N/A |
| 6.1 | Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment | | N/A |
| 6.1.1 | Protection from hazardous voltages | | N/A |
| 6.1.2 | Separation of the telecommunication network from earth | | N/A |
| 6.1.2.1 | Requirements | (see appended table 5.2) | N/A |
| | Supply voltage (V) : | | — |
| | Current in the test circuit (mA) : | | — |
| 6.1.2.2 | Exclusions : | | N/A |

| | | | |
|------------|--|--|------------|
| 6.2 | Protection of equipment users from overvoltages on telecommunication networks | | N/A |
| 6.2.1 | Separation requirements | | N/A |
| 6.2.2 | Electric strength test procedure | | N/A |
| 6.2.2.1 | Impulse test | | N/A |
| 6.2.2.2 | Steady-state test | | N/A |
| 6.2.2.3 | Compliance criteria | | N/A |

| | | | |
|------------|---|--|------------|
| 6.3 | Protection of the telecommunication wiring system from overheating | | N/A |
| | Max. output current (A) : | | — |
| | Current limiting method : | | — |

| | | | |
|----------|---|--|------------|
| 7 | CONNECTION TO CABLE DISTRIBUTION SYSTEMS | | N/A |
| 7.1 | General | | N/A |
| 7.2 | Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment | | N/A |
| 7.3 | Protection of equipment users from overvoltages on the cable distribution system | | N/A |

| IEC 60950-1 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 7.4 | Insulation between primary circuits and cable distribution systems | | N/A |
| 7.4.1 | General | | N/A |
| 7.4.2 | Voltage surge test | | N/A |
| 7.4.3 | Impulse test | | N/A |

| | | | |
|----------|--|--|------------|
| A | Annex A, TESTS FOR RESISTANCE TO HEAT AND FIRE | | N/A |
| A.1 | Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2) | | N/A |
| A.1.1 | Samples : | | — |
| | Wall thickness (mm) : | | — |
| A.1.2 | Conditioning of samples; temperature (°C) : | | N/A |
| A.1.3 | Mounting of samples : | | N/A |
| A.1.4 | Test flame (see IEC 60695-11-3) | | N/A |
| | Flame A, B, C or D : | | — |
| A.1.5 | Test procedure | | N/A |
| A.1.6 | Compliance criteria | | N/A |
| | Sample 1 burning time (s) : | | — |
| | Sample 2 burning time (s) : | | — |
| | Sample 3 burning time (s) : | | — |
| A.2 | Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4) | | N/A |
| A.2.1 | Samples, material : | | — |
| | Wall thickness (mm) : | | — |
| A.2.2 | Conditioning of samples; temperature (°C) : | | — |
| A.2.3 | Mounting of samples : | | — |
| A.2.4 | Test flame (see IEC 60695-11-4) | | — |
| | Flame A, B or C : | | — |
| A.2.5 | Test procedure | | N/A |
| A.2.6 | Compliance criteria | | N/A |
| | Sample 1 burning time (s) : | | — |
| | Sample 2 burning time (s) : | | — |
| | Sample 3 burning time (s) : | | — |

| IEC 60950-1 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| A.2.7 | Alternative test acc. to IEC 60695-11-5, cl. 5 and 9 | | N/A |
| | Sample 1 burning time (s) : | | — |
| | Sample 2 burning time (s) : | | — |
| | Sample 3 burning time (s) : | | — |
| A.3 | Hot flaming oil test (see 4.6.2) | | N/A |
| A.3.1 | Mounting of samples | | N/A |
| A.3.2 | Test procedure | | N/A |
| A.3.3 | Compliance criterion | | N/A |

| | | | |
|----------|---|--------------------------|------------|
| B | Annex B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2) | | N/A |
| B.1 | General requirements | | N/A |
| | Position : | | — |
| | Manufacturer : | | — |
| | Type : | | — |
| | Rated values : | | — |
| B.2 | Test conditions | | N/A |
| B.3 | Maximum temperatures | (see appended table 5.3) | N/A |
| B.4 | Running overload test | (see appended table 5.3) | N/A |
| B.5 | Locked-rotor overload test | | N/A |
| | Test duration (days) : | | — |
| | Electric strength test: test voltage (V) : | | — |
| B.6 | Running overload test for d.c. motors in secondary circuits | | N/A |
| B.6.1 | General | | N/A |
| B.6.2 | Test procedure | | N/A |
| B.6.3 | Alternative test procedure | | N/A |
| B.6.4 | Electric strength test; test voltage (V): | | N/A |
| B.7 | Locked-rotor overload test for d.c. motors in secondary circuits | | N/A |
| B.7.1 | General | | N/A |
| B.7.2 | Test procedure | | N/A |
| B.7.3 | Alternative test procedure | | N/A |
| B.7.4 | Electric strength test; test voltage (V): | | N/A |

| IEC 60950-1 | | | |
|-------------|---------------------------------|--------------------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| B.8 | Test for motors with capacitors | (see appended table 5.3) | N/A |
| B.9 | Test for three-phase motors | (see appended table 5.3) | N/A |
| B.10 | Test for series motors | | N/A |
| | Operating voltage (V) | | — |

| | | | |
|----------|--|--------------------------|------------|
| C | Annex C, TRANSFORMERS (see 1.5.4 and 5.3.3) | | N/A |
| | Position | | — |
| | Manufacturer | (See 1.5.4 and 5.3.3) | — |
| | Type | (See 1.5.4 and 5.3.3) | — |
| | Rated values | | — |
| | Method of protection..... | | — |
| C.1 | Overload test | (see appended table 5.3) | N/A |
| C.2 | Insulation | (see appended table 5.2) | N/A |
| | Protection from displacement of windings | | N/A |

| | | | |
|----------|---|--|------------|
| D | Annex D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4) | | N/A |
| D.1 | Measuring instrument | | N/A |
| D.2 | Alternative measuring instrument | | N/A |

| | | | |
|----------|--|--|------------|
| E | ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13) | | N/A |
|----------|--|--|------------|

| | | | |
|----------|---|--|------------|
| F | ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G) | | N/A |
|----------|---|--|------------|

| | | | |
|----------|---|----------|------------|
| G | ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES | | N/A |
| G.1 | Clearances | | N/A |
| G.1.1 | General | | N/A |
| G.1.2 | Summary of the procedure for determining minimum clearances | | N/A |
| G.2 | Determination of mains transient voltage (V) | | N/A |
| G.2.1 | AC mains supply | | N/A |
| G.2.2 | Earthed d.c. mains supplies | | N/A |
| G.2.3 | Unearthed d.c. mains supplies | | N/A |
| G.2.4 | Battery operation | Battery. | N/A |

| IEC 60950-1 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| G.3 | Determination of telecommunication network transient voltage (V) | | -- |
| G.4 | Determination of required withstand voltage (V) | | N/A |
| G.4.1 | Mains transients and internal repetitive peaks | | N/A |
| G.4.2 | Transients from telecommunication networks | | N/A |
| G.4.3 | Combination of transients | | N/A |
| G.4.4 | Transients from cable distribution systems | | N/A |
| G.5 | Measurement of transient voltages (V) | | N/A |
| | a) Transients from a mains supply | | N/A |
| | For an a.c. mains supply | | N/A |
| | For a d.c. mains supply | | N/A |
| | b) Transients from a telecommunication network | | N/A |
| G.6 | Determination of minimum clearances | | N/A |

| | | |
|----------|---|------------|
| H | ANNEX H, IONIZING RADIATION (see 4.3.13) | N/A |
|----------|---|------------|

| | | |
|----------|---|------------|
| J | ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6) | N/A |
| | Metal used | N/A |

| | | |
|----------|--|------------------------------|
| K | ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8) | N/A |
| K.1 | Making and breaking capacity | N/A |
| K.2 | Thermostat reliability; operating voltage (V) | N/A |
| K.3 | Thermostat endurance test; operating voltage (V) : | N/A |
| K.4 | Temperature limiter endurance; operating voltage (V) | N/A |
| K.5 | Thermal cut-out reliability | N/A |
| K.6 | Stability of operation | (see appended table 5.3) N/A |

| | | |
|----------|--|------------|
| L | ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2) | N/A |
| L.1 | Typewriters | N/A |
| L.2 | Adding machines and cash registers | N/A |
| L.3 | Erasers | N/A |
| L.4 | Pencil sharpeners | N/A |
| L.5 | Duplicators and copy machines | N/A |
| L.6 | Motor-operated files | N/A |

| IEC 60950-1 | | | |
|-------------|--------------------------|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| L.7 | Other business equipment | | N/A |

| M | ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1) | | N/A |
|---------|---|--|-----|
| M.1 | Introduction | | N/A |
| M.2 | Method A | | N/A |
| M.3 | Method B | | N/A |
| M.3.1 | Ringing signal | | N/A |
| M.3.1.1 | Frequency (Hz) | | — |
| M.3.1.2 | Voltage (V) | | — |
| M.3.1.3 | Cadence; time (s), voltage (V) | | — |
| M.3.1.4 | Single fault current (mA) | | — |
| M.3.2 | Tripping device and monitoring voltage | | — |
| M.3.2.1 | Conditions for use of a tripping device or a monitoring voltage | | N/A |
| M.3.2.2 | Tripping device | | N/A |
| M.3.2.3 | Monitoring voltage (V) | | N/A |

| N | ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5) | | N/A |
|-----|---|--|-----|
| N.1 | ITU-T impulse test generators | | N/A |
| N.2 | IEC 60065 impulse test generator | | N/A |

| P | ANNEX P, NORMATIVE REFERENCES | | — |
|---|-------------------------------|--|---|
|---|-------------------------------|--|---|

| Q | ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1) | | N/A |
|---|---|--|-----|
| | a) Preferred climatic categories | | N/A |
| | b) Maximum continuous voltage | | N/A |
| | c) Pulse current | | N/A |

| R | ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES | | N/A |
|-----|---|--|-----|
| R.1 | Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2) | | N/A |
| R.2 | Reduced clearances (see 2.10.3) | | N/A |

| S | ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3) | | N/A |
|-----|--|--|-----|
| S.1 | Test equipment | | N/A |

| IEC 60950-1 | | | |
|-------------|---|--------------------------|------------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| S.2 | Test procedure | | N/A |
| S.3 | Examples of waveforms during impulse testing | | N/A |
| T | ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.2) | | N/A |
| | | See separate test report | — |
| U | ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4) | | N/A |
| | | See separate test report | — |
| V | ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1) | | N/A |
| V.1 | Introduction | | N/A |
| V.2 | TN power distribution systems | | N/A |
| W | ANNEX W, SUMMATION OF TOUCH CURRENTS | | N/A |
| W.1 | Touch current from electronic circuits | | N/A |
| W.1.1 | Floating circuits | | N/A |
| W.1.2 | Earthed circuits | | N/A |
| W.2 | Interconnection of several equipments | | N/A |
| W.2.1 | Isolation | | N/A |
| W.2.2 | Common return, isolated from earth | | N/A |
| W.2.3 | Common return, connected to protective earth | | N/A |
| X | ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1) | | N/A |
| X.1 | Determination of maximum input current | | N/A |
| X.2 | Overload test procedure | | N/A |
| Y | ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3) | | N/A |
| Y.1 | Test apparatus | | N/A |
| Y.2 | Mounting of test samples | | N/A |
| Y.3 | Carbon-arc light-exposure apparatus | | N/A |
| Y.4 | Xenon-arc light exposure apparatus | | N/A |
| Z | ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2) | | N/A |
| AA | ANNEX AA, MANDREL TEST (see 2.10.5.8) | | N/A |

| IEC 60950-1 | | | |
|-------------|--------------------|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |

| | | | |
|-----------|--|--|---|
| BB | ANNEX BB, CHANGES IN THE SECOND EDITION | | — |
|-----------|--|--|---|

| | | | |
|-----------|---|--|------------|
| CC | ANNEX CC, Evaluation of integrated circuit (IC) current limiters | | N/A |
| CC.1 | General | | N/A |
| CC.2 | Test program 1.....: | | N/A |
| CC.3 | Test program 2.....: | | N/A |

| | | | |
|-----------|--|--|------------|
| DD | ANNEX DD, Requirements for the mounting means of rack-mounted equipment | | N/A |
| DD.1 | General | | N/A |
| DD.2 | Mechanical strength test, variable N.....: | | N/A |
| DD.3 | Mechanical strength test, 250N, including end stops.....: | | N/A |
| DD.4 | Compliance.....: | | N/A |

| | | | |
|-----------|---|--|------------|
| EE | ANNEX EE, Household and home/office document/media shredders | | N/A |
| EE.1 | General | | N/A |
| EE.2 | Markings and instructions | | N/A |
| | Use of markings or symbols.....: | | N/A |
| | Information of user instructions, maintenance and/or servicing instructions.....: | | N/A |
| EE.3 | Inadvertent reactivation test.....: | | N/A |
| EE.4 | Disconnection of power to hazardous moving parts: | | N/A |
| | Use of markings or symbols.....: | | N/A |
| EE.5 | Protection against hazardous moving parts | | N/A |
| | Test with test finger (Figure 2A): | | N/A |
| | Test with wedge probe (Figure EE1 and EE2): | | N/A |

| IEC 60950-1 | | | |
|-------------|--------------------|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |

EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013 – CENELEC COMMON MODIFICATIONS


| | | | |
|-------------------|---|--|-----|
| Contents | <p>Add the following annexes:</p> <p>Annex ZA (normative) Normative references to international publications with their corresponding European publications</p> <p>Annex ZB (normative) Special national conditions</p> | | P |
| General | <p>Delete all the “country” notes in the reference document (IEC 60950-1:2005) according to the following list:</p> <p>1.4.8 Note 2 1.5.1 Note 2 & 3 1.5.7.1 Note 1.5.8 Note 2 1.5.9.4 Note 1.7.2.1 Note 4, 5 & 6 2.2.3 Note 2.2.4 Note 2.3.2 Note 2.3.2.1 Note 2 2.3.4 Note 2 2.6.3.3 Note 2 & 3 2.7.1 Note 2.10.3.2 Note 2 2.10.5.13 Note 3 3.2.1.1 Note 3.2.4 Note 3.2.5.1 Note 2 4.3.6 Note 1 & 2 4.7 Note 4 4.7.2.2 Note 4.7.3.1 Note 2 5.1.7.1 Note 3 & 4 5.3.7 Note 1 6 Note 2 & 5 6.1.2.1 Note 2 6.1.2.2 Note 6.2.2 Note 6.2.2.1 Note 2 6.2.2.2 Note 7.1 Note 3 7.2 Note 7.3 Note 1 & 2 G.2.1 Note 2 Annex H Note 2</p> | | P |
| General (A1:2010) | <p>Delete all the “country” notes in the reference document (IEC 60950-1:2005/A1:2010) according to the following list:</p> <p>1.5.7.1 Note 6.1.2.1 Note 2 6.2.2.1 Note 2 EE.3 Note</p> | | P |
| 1.3.Z1 | <p>Add the following subclause:</p> <p>1.3.Z1 Exposure to excessive sound pressure</p> <p>The apparatus shall be so designed and constructed as to present no danger when used for its intended purpose, either in normal operating conditions or under fault conditions, particularly providing protection against exposure to excessive sound pressures from headphones or earphones.</p> <p>NOTE Z1 A new method of measurement is described in EN 50332-1, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for “one package equipment”, and in EN 50332-2, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Guidelines to associate sets with headphones coming from different manufacturers.</p> | | N/A |

| IEC 60950-1 | | | |
|-----------------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| (A12:2011) | In EN 60950-1:2006/A12:2011 Delete the addition of 1.3.Z1 / EN 60950-1:2006 Delete the definition 1.2.3.Z1 / EN 60950-1:2006 /A1:2010 | | N/A |
| 1.5.1 | Add the following NOTE: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC | | N/A |
| 1.7.2.1 (A1:2010) | In addition, for a PORTABLE SOUND SYSTEM, the instructions shall include a warning that excessive sound pressure from earphones and headphones can cause hearing loss. | | N/A |
| 1.7.2.1 (A12:2011) | In EN 60950-1:2006/A12:2011 Delete NOTE Z1 and the addition for Portable Sound System. Add the following clause and annex to the existing standard and amendments. | | N/A |
| | Zx Protection against excessive sound pressure from personal music players | | N/A |

| IEC 60950-1 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | <p>Zx.1 General</p> <p>This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players.</p> <p>A personal music player is a portable equipment for personal use, that:</p> <ul style="list-style-type: none"> – is designed to allow the user to listen to recorded or broadcast sound or video; and – primarily uses headphones or earphones that can be worn in or on or around the ears; and – allows the user to walk around while in use. <p>NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment.</p> <p>A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause.</p> <p>The requirements in this sub-clause are valid for music or video mode only.</p> <p>The requirements do not apply:</p> <ul style="list-style-type: none"> – while the personal music player is connected to an external amplifier; or – while the headphones or earphones are not used. <p>NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player.</p> <p>The requirements do not apply to:</p> <ul style="list-style-type: none"> – hearing aid equipment and professional equipment; <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p> | | N/A |
| | <ul style="list-style-type: none"> – analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before the end of 2015. <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <p>For equipment which is clearly designed or intended for use by young children, the limits of EN 71-1 apply.</p> | | N/A |

| IEC 60950-1 | | | |
|-------------|--|------------------------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | <p>Zx.2 Equipment requirements</p> <p>No safety provision is required for equipment that complies with the following:</p> <ul style="list-style-type: none"> – equipment provided as a package (personal music player with its listening device), where the acoustic output $L_{Aeq,T}$ is ≤ 85 dBA measured while playing the fixed “programme simulation noise” as described in EN 50332-1; and – a personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is ≤ 27 mV measured as described in EN 50332-2, while playing the fixed “programme simulation noise” as described in EN 50332-1. <p>NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level $L_{Aeq,T}$ is meant. See also Zx.5 and Annex Zx.</p> <p>All other equipment shall:</p> <ol style="list-style-type: none"> protect the user from unintentional acoustic outputs exceeding those mentioned above; <p>and</p> <ol style="list-style-type: none"> have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and | $L_{Aeq,T}$ is ≤ 85 dBA | N/A |

| IEC 60950-1 | | | |
|-------------|---|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | <p>c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and</p> <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always required.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off.</p> <p>d) have a warning as specified in Zx.3; and</p> <p>e) not exceed the following:</p> <ol style="list-style-type: none"> 1) equipment provided as a package (player with its listening device), the acoustic output shall be ≤ 100 dBA measured while playing the fixed "programme simulation noise" described in EN 50332-1; and 2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be ≤ 150 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1. <p>For music where the average sound pressure (long term $L_{Aeq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song.</p> <p>NOTE 4 Classical music typically has an average sound pressure (long term $L_{Aeq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA.</p> <p>For example, if the player is set with the programme simulation noise to 85 dBA, but the average music level of the song is only 65 dBA, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dBA.</p> | | N/A |

| IEC 60950-1 | | | |
|-------------|--|------------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | <p>Zx.3 Warning</p> <p>The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following:</p> <ul style="list-style-type: none"> – the symbol of Figure 1 with a minimum height of 5 mm; and – the following wording, or similar: <p>“To prevent possible hearing damage, do not listen at high volume levels for long periods.”</p>  <p>Figure 1 – Warning label (IEC 60417-6044)</p> <p>Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.</p> | See user manual. | N/A |
| | Zx.4 Requirements for listening devices (headphones and earphones) | | N/A |
| | <p>Zx.4.1 Wired listening devices with analogue input</p> <p>With 94 dBA sound pressure output $L_{Aeq,T}$, the input voltage of the fixed “programme simulation noise” described in EN 50332-2 shall be ≥ 75 mV.</p> <p>This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control).</p> <p>NOTE The values of 94 dBA – 75 mV correspond with 85dBA – 27 mV and 100 dBA – 150 mV.</p> | | N/A |

| IEC 60950-1 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | <p>Zx.4.2 Wired listening devices with digital input With any playing device playing the fixed “programme simulation noise” described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output $L_{Aeq,T}$ of the listening device shall be ≤ 100 dBA.</p> <p>This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.).</p> <p>NOTE An example of a wired listening device with digital input is a USB headphone.</p> | | N/A |
| | <p>Zx.4.3 Wireless listening devices In wireless mode:</p> <ul style="list-style-type: none"> – with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and – respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and – with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the abovementioned programme simulation noise, the acoustic output $L_{Aeq,T}$ of the listening device shall be ≤ 100 dBA. <p>NOTE An example of a wireless listening device is a Bluetooth headphone.</p> | | N/A |
| | <p>Zx.5 Measurement methods Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s.</p> <p>NOTE Test method for wireless equipment provided without listening device should be defined.</p> | | N/A |

| IEC 60950-1 | | | | | | | | | |
|--------------------------------|--|-----------------------|--------------------|-------------------------------|--------------------------|--------------------------------|-------------------------|--|-----|
| Clause | Requirement – Test | Result - Remark | Verdict | | | | | | |
| 2.7.1 | <p>Replace the subclause as follows:</p> <p>Basic requirements</p> <p>To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> | | N/A | | | | | | |
| | <p>c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p> | | N/A | | | | | | |
| 2.7.2 | This subclause has been declared 'void'. | | --- | | | | | | |
| 3.2.3 | Delete the NOTE in Table 3A, and delete also in this table the conduit sizes in parentheses. | | N/A | | | | | | |
| 3.2.5.1 | <p>Replace "60245 IEC 53" by "H05 RR-F";</p> <p>"60227 IEC 52" by "H03 VV-F or H03 VVH2-F";</p> <p>"60227 IEC 53" by "H05 VV-F or H05 VVH2-F2".</p> <p>In Table 3B, replace the first four lines by the following:</p> <table><tr><td>Up to and including 6 </td><td>0,75 ^{a)} </td></tr><tr><td>Over 6 up to and including 10 </td><td>(0,75) ^{b)} 1,0 </td></tr><tr><td>Over 10 up to and including 16 </td><td>(1,0) ^{c)} 1,5 </td></tr></table> <p>In the conditions applicable to Table 3B delete the words "in some countries" in condition ^{a)}.</p> <p>In NOTE 1, applicable to Table 3B, delete the second sentence.</p> | Up to and including 6 | 0,75 ^{a)} | Over 6 up to and including 10 | (0,75) ^{b)} 1,0 | Over 10 up to and including 16 | (1,0) ^{c)} 1,5 | | N/A |
| Up to and including 6 | 0,75 ^{a)} | | | | | | | | |
| Over 6 up to and including 10 | (0,75) ^{b)} 1,0 | | | | | | | | |
| Over 10 up to and including 16 | (1,0) ^{c)} 1,5 | | | | | | | | |

| IEC 60950-1 | | | |
|-----------------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 3.3.4 | In Table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following: Over 10 up to and including 16 1,5 to 2,5 1,5 to 4 Delete the fifth line: conductor sizes for 13 to 16 A | | N/A |
| 4.3.13.6 (A1:2010) | Replace the existing NOTE by the following: NOTE Z1 Attention is drawn to: 1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz, and 2006/25/EC: Directive on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation). | | N/A |
| | Standards taking into account mentioned Recommendation and Directive which demonstrate compliance with the applicable EU Directive are indicated in the OJEC. | | N/A |
| Annex H | Replace the last paragraph of this annex by: At any point 10 cm from the surface of the OPERATOR ACCESS AREA, the dose rate shall not exceed 1 µSv/h (0,1 mR/h) (see NOTE). Account is taken of the background level. Replace the notes as follows: NOTE These values appear in Directive 96/29/Euratom. Delete NOTE 2. | | N/A |
| Bibliography | Additional EN standards. | | — |
| ZA | NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS | | — |



| | | |
|-----------|--|------------|
| ZB | SPECIAL NATIONAL CONDITIONS | N/A |
| 1.2.4.1 | In Denmark , certain types of Class I appliances (see 3.2.1.1) may be provided with a plug not establishing earthing conditions when inserted into Danish socket-outlets. | N/A |
| 1.5.7.1 | In Finland , Norway and Sweden , resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.2. | N/A |
| 1.5.8 | In Norway , due to the IT power system used (see annex V, Figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V). | N/A |
| 1.5.9.4 | In Finland , Norway and Sweden , the third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex. | N/A |

| IEC 60950-1 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|--|-----------------|-----------------|---------|-----------------|-----------------|--------------|-----|-------------|-----------------|--------------|--------|-------------|-----------------|--------------|---------|-----------------|-----------------|--------------|-----|-------------|-----------------|--------------|--------|-------------|--|-----|
| Clause | Requirement – Test | Result - Remark | Verdict | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.7.2.1 | <p>In Finland, Norway and Sweden, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Finland: "Laite on liitettävä suojamaadoituskoskettimilla varustettuun pistorasiaan"</p> <p>In Norway: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In Sweden: "Apparaten skall anslutas till jordat uttag"</p> | | N/A | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.7.5 | In Denmark , socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For STATIONARY EQUIPMENT the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a. | | N/A | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.2.4 | In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex. | | N/A | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.3.2 | In Finland, Norway and Sweden there are additional requirements for the insulation. See 6.1.2.1 and 6.1.2.2 of this annex. | | N/A | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.3.4 | In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex. | | N/A | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.6.3.3 | In the United Kingdom , the current rating of the circuit shall be taken as 13 A, not 16 A. | | N/A | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.7.1 | In the United Kingdom , to protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met. | | N/A | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.10.5.13 | In Finland, Norway and Sweden , there are additional requirements for the insulation, see 6.1.2.1 and 6.1.2.2 of this annex. | | N/A | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.2.1.1 | <p>In Switzerland, supply cords of equipment having a RATED CURRENT not exceeding 10 A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets:</p> <table> <tr> <td>SEV 6532-2.1991</td><td>Plug Type 15</td><td>3P+N+PE</td><td>250/400 V, 10 A</td></tr> <tr> <td>SEV 6533-2.1991</td><td>Plug Type 11</td><td>L+N</td><td>250 V, 10 A</td></tr> <tr> <td>SEV 6534-2.1991</td><td>Plug Type 12</td><td>L+N+PE</td><td>250 V, 10 A</td></tr> </table> <p>In general, EN 60309 applies for plugs for currents exceeding 10 A. However, a 16 A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February 1998:</p> <table> <tr> <td>SEV 5932-2.1998</td><td>Plug Type 25</td><td>3L+N+PE</td><td>230/400 V, 16 A</td></tr> <tr> <td>SEV 5933-2.1998</td><td>Plug Type 21</td><td>L+N</td><td>250 V, 16 A</td></tr> <tr> <td>SEV 5934-2.1998</td><td>Plug Type 23</td><td>L+N+PE</td><td>250 V, 16 A</td></tr> </table> | SEV 6532-2.1991 | Plug Type 15 | 3P+N+PE | 250/400 V, 10 A | SEV 6533-2.1991 | Plug Type 11 | L+N | 250 V, 10 A | SEV 6534-2.1991 | Plug Type 12 | L+N+PE | 250 V, 10 A | SEV 5932-2.1998 | Plug Type 25 | 3L+N+PE | 230/400 V, 16 A | SEV 5933-2.1998 | Plug Type 21 | L+N | 250 V, 16 A | SEV 5934-2.1998 | Plug Type 23 | L+N+PE | 250 V, 16 A | | N/A |
| SEV 6532-2.1991 | Plug Type 15 | 3P+N+PE | 250/400 V, 10 A | | | | | | | | | | | | | | | | | | | | | | | | |
| SEV 6533-2.1991 | Plug Type 11 | L+N | 250 V, 10 A | | | | | | | | | | | | | | | | | | | | | | | | |
| SEV 6534-2.1991 | Plug Type 12 | L+N+PE | 250 V, 10 A | | | | | | | | | | | | | | | | | | | | | | | | |
| SEV 5932-2.1998 | Plug Type 25 | 3L+N+PE | 230/400 V, 16 A | | | | | | | | | | | | | | | | | | | | | | | | |
| SEV 5933-2.1998 | Plug Type 21 | L+N | 250 V, 16 A | | | | | | | | | | | | | | | | | | | | | | | | |
| SEV 5934-2.1998 | Plug Type 23 | L+N+PE | 250 V, 16 A | | | | | | | | | | | | | | | | | | | | | | | | |

| IEC 60950-1 | | | |
|-------------|---|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 3.2.1.1 | <p>In Denmark, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current Regulations, Section 107-2-D1 or EN 60309-2.</p> | | N/A |
| 3.2.1.1 | <p>In Spain, supply cords of single-phase equipment having a rated current not exceeding 10 A shall be provided with a plug according to UNE 20315:1994.</p> <p>Supply cords of single-phase equipment having a rated current not exceeding 2,5 A shall be provided with a plug according to UNE-EN 50075:1993.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994.</p> <p>If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.</p> | | N/A |
| 3.2.1.1 | <p>In the United Kingdom, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a 'standard plug' in accordance with Statutory Instrument 1768:1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations.</p> <p>NOTE 'Standard plug' is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p> | | N/A |
| 3.2.1.1 | <p>In Ireland, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to I.S. 411 by means of that flexible cable or cord and plug, shall be fitted with a 13 A plug in accordance with Statutory Instrument 525:1997 - National Standards Authority of Ireland (section 28) (13 A Plugs and Conversion Adaptors for Domestic Use) Regulations 1997.</p> | | N/A |
| 3.2.4 | In Switzerland , for requirements see 3.2.1.1 of this annex. | | N/A |
| 3.2.5.1 | In the United Kingdom , a power supply cord with conductor of 1,25 mm ² is allowed for equipment with a rated current over 10 A and up to and including 13 A. | | N/A |
| 3.3.4 | <p>In the United Kingdom, the range of conductor sizes of flexible cords to be accepted by terminals for equipment with a RATED CURRENT of over 10 A up to and including 13 A is:</p> <ul style="list-style-type: none"> • 1,25 mm² to 1,5 mm² nominal cross-sectional area. | | N/A |

| IEC 60950-1 | | | |
|-------------|--|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 4.3.6 | In the United Kingdom , the torque test is performed using a socket outlet complying with BS 1363 part 1:1995, including Amendment 1:1997 and Amendment 2:2003 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply. | | N/A |
| 4.3.6 | In Ireland , DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 - National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997. | | N/A |
| 5.1.7.1 | <p>In Finland, Norway and Sweden TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment:</p> <ul style="list-style-type: none"> • STATIONARY PLUGGABLE EQUIPMENT TYPE A that <ul style="list-style-type: none"> ◦ is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and ◦ has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and ◦ is provided with instructions for the installation of that conductor by a SERVICE PERSON; • STATIONARY PLUGGABLE EQUIPMENT TYPE B; • STATIONARY PERMANENTLY CONNECTED EQUIPMENT. | | N/A |

| IEC 60950-1 | | | |
|-------------|---|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| 6.1.2.1 | <p>In Finland, Norway and Sweden, add the following text between the first and second paragraph of the compliance clause:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with a capacitor complying with EN 132400:1994, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 132400:1994, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 132400, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in IEC 60950-1:2005, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 132400; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 132400, in the sequence of tests as described in EN 132400. | | N/A |
| 6.1.2.2 | <p>In Finland, Norway and Sweden, the exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.</p> | | N/A |
| 7.2 | <p>In Finland, Norway and Sweden, for requirements see 6.1.2.1 and 6.1.2.2 of this annex.</p> <p>The term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.</p> | | N/A |
| 7.3 | <p>In Norway and Sweden, there are many buildings where the screen of the coaxial cable is normally not connected to the earth in the building installation.</p> | | N/A |
| 7.3 | <p>In Norway, for installation conditions see EN 60728-11:2005.</p> | | N/A |

| IEC 60950-1 | | | |
|-------------|---|-----------------|------------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| ZC | A-DEVIATIONS (informative) | | N/A |
| 1.5.1 | Sweden (Ordinance 1990:944) Add the following: NOTE In Sweden, switches containing mercury are not permitted. | | N/A |
| 1.5.1 | Switzerland (Ordinance on environmentally hazardous substances SR 814.081, Annex 1.7, Mercury - Annex 1.7 of SR 814.81 applies for mercury.) Add the following: NOTE In Switzerland, switches containing mercury such as thermostats, relays and level controllers are not allowed. | | N/A |
| 1.7.2.1 | Denmark (Heavy Current Regulations) Supply cords of CLASS I EQUIPMENT, which is delivered without a plug, must be provided with a visible tag with the following text: <div style="text-align: center;"> Vigtigt! Lederen med grøn/gul isolation må kun tilsluttes en klemme mærket  eller  </div> If essential for the safety of the equipment, the tag must in addition be provided with a diagram, which shows the connection of the other conductors, or be provided with the following text: “For tilslutning af de øvrige ledere, se medfølgende installationsvejledning.” | | N/A |
| 1.7.2.1 | Germany (Gesetz über technische Arbeitsmittel und Verbraucherprodukte (Geräte- und Produktsicherheitsgesetz – GPSG) [Law on technical labour equipment and consumer products], of 6th January 2004, Section 2, Article 4, Clause (4), Item 2). If for the assurance of safety and health certain rules during use, amending or maintenance of a technical labour equipment or readymade consumer product are to be followed, a manual in German language has to be delivered when placing the product on the market. Of this requirement, rules for use even only by SERVICE PERSONS are not exempted. | | N/A |
| 1.7.5 | Denmark (Heavy Current Regulations) With the exception of CLASS II EQUIPMENT provided with a socket outlet in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-4a, CLASS II EQUIPMENT shall not be fitted with socket-outlets for providing power to other equipment. | | N/A |
| 1.7.13 | Switzerland (Ordinance on chemical hazardous risk reduction SR 814.81, Annex 2.15 Batteries) Annex 2.15 of SR 814.81 applies for batteries. | | N/A |
| 5.1.7.1 | Denmark (Heavy Current Regulations, Chapter 707, clause 707.4) TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for PERMANENTLY CONNECTED EQUIPMENT and PLUGGABLE EQUIPMENT TYPE B. | | N/A |

| 1.5.1 | TABLE: list of critical components | | | | | P |
|---|---|--------------|--|------------|--|---|
| object/part No. | manufacturer/ trademark | type/model | technical data | standard | mark(s) of conformity ¹⁾ | |
| Plastic Enclosure | SABIC INNOVATIVE PLASTICS US L L C | HRA222F (GG) | V-0 or better, 90°C, min. thickness: 2.0mm, | UL 94 | UL | |
| PCB | SHENZHEN TONGXIN CIRCUIT ELECTRONICS CO LTD | YT-11 | 130°C 94V-0 | UL 796 | UL E201362 | |
| Heat shrinkable tube | SHENZHEN WOLIDA TRADING CO LTD | RSFR-H | 600V 125°C | UL 224 | UL E329530 | |
| SWITCHING POWER SUPPLY | MEAN WELL ENTERPRISES CO LTD | NES-35-15 | Input:100-240V~ 50/60Hz 0.9A Max Output:15V=2.4A | UL 60950-1 | UL E183223 | |
| Internal wire | DONGGUAN WENCHANG ELECTRONIC CO LTD | 2651 | 28AWG 105°C 300V VW-1 | UL 758 | UL E214500 | |
| Speaker | Various | Various | 8 ohm, 0.5W | EN60950-1 | Tested with appliance | |
| ¹⁾ an asterisk indicates a mark which assures the agreed level of surveillance | | | | | | |

| 1.6.2 | TABLE: electrical data test (in normal conditions) | | | | | P |
|---|--|---------|-------|-------|-----------------------|-------------|
| fuse # | I rated (A) | U (V) | I (A) | P(W) | Battery Voltage(V) | condition |
| | 3.0 | 12.0VDC | 2.24 | 26.88 | -- | Normal work |
| Remark: The steady state input current [did] [did not] exceed the rated current at the rated voltage by more than 10 percent under maximum normal load. | | | | | | |

| 1.7.11 | TABLE: durability of marking test | | | P |
|--------------------|-----------------------------------|------|-------------------------------------|---|
| Location | Checked by | Time | Result | |
| External enclosure | Water | 15s | No any curling and still legibility | |
| External enclosure | Petroleum spirit | 15s | No any curling and still legibility | |

| 2.1.1.5 | TABLE: Hazardous energy measurement | | | N/A |
|--|-------------------------------------|--------------------|----------------|-----|
| Output | Voltage (Max.) (V) | Current (Max.) (A) | VA (Max.) (VA) | |
| | | | | |
| Remark: Input: 1.1 times rate voltage | | | | |

| | | | | | |
|-----------|-----------------------|------------|------------|----------|-----|
| 2.1.1.7 | TABLE: discharge test | | | | N/A |
| Condition | calculated | calculated | T u →0V(s) | Comments | |
| | | | | | |
| Remark: | | | | | |
| Input: | | | | | |

| | | | | |
|---|---|-------------------------|----------|-----|
| 2.2.2& 2.2.3 | TABLE: voltage measurement under normal and fault condition | | | N/A |
| Location | condition | Voltage measurement (V) | Comments | |
| | | | | |
| | | | | |
| Remark: The voltage should not exceeds 42.4V peak and 60Vd.c , and moreover,71V peak and 120V dc(0.2s) in fault condition | | | | |
| Input: Un | | | | |

| | | | | | | |
|----------|--|--------------|-------------|------------|----------|-----|
| 2.4.2 | TABLE: limited current circuit measurement | | | | | N/A |
| Location | Voltage (V) | Current (mA) | Freq. (kHz) | Limit (mA) | Comments | |
| | | | | | | |
| Remark: | | | | | | |

| | | | | |
|--|---|--------------------------|--------------------------|-------------------------|
| 2.5 | TABLE: limited power source measurement | | | N/A |
| Condition | | Output voltage (Uoc) (V) | Output current (Isc) (A) | Apparent power (S) (VA) |
| | | | | |
| | | | | |
| Uoc: max output voltage, Isc: max. output current with any non-capacitive load, including a short circuit, measured 5s after application of the load, S(VA): max. output VA with any non-capacitive load, including a short circuit, measured 5s after application of the load | | | | |
| Remark: | | | | |

| | | | | |
|----------|---|-------------------------|----------|-----|
| 2.6.3.3 | TABLE: provisions for protective earthing | | | N/A |
| Location | | Resistance measured(mΩ) | Comments | |
| | | | | |
| Note: | | | | |

| | | | | | |
|--|----------------------|-------------|-------------------|----------|-----------------|
| 2.9.2 | TABLE: humidity test | | | | P |
| Test condition: | | Temperature | Relative Humidity | Duration | Breakdown (Y/N) |
| | | 25°C | 93% | 48h | N |
| Remark: After humidity test, electric strength test specified in clause 5.2.2 should be applied. | | | | | |

| | | | | |
|------------------|------------------------------------|------------------|-----------------|------------------------|
| 2.10.2 | TABLE: working voltage measurement | | | N/A |
| Location | | Peak Voltage (V) | RMR Voltage (V) | Comments ¹⁾ |
| | | | | |
| | | | | |
| | | | | |
| Remark: | | | | |
| Input: 240V/50Hz | | | | |

| | | | | | | |
|---|--|--------------|------------------|---------|-------------------|------------|
| 2.10.3 and 2.10.4 | TABLE: clearance and creepage distance measurements | | | | | N/A |
| clearance cl and creepage distance dcr at/of: | Up (V) | U r.m.s. (V) | required cl (mm) | cl (mm) | required dcr (mm) | dcr (mm) |
| | | | | | | |
| Remark: | | | | | | |

| | | | | | |
|----------|---------------------------|----------|-------|-------------------|-----|
| 3.2.6 | TABLE: strain relief test | | | | N/A |
| Mass(Kg) | Pull force(N) | Duration | Times | Displaced (≤2mm) | |
| | | | | | |
| Remark: | | | | | |

| | | | | | |
|-----------|--------------------------------|----------|-----------|-----------------|---|
| 4.2.4 | TABLE: steady force test ,250N | | | | P |
| Test part | Push force(N) | Duration | Result | Breakdown (Y/N) | |
| Top | 250 | 5s | No damage | N | |
| Side | 250 | 5s | No damage | N | |
| Bottom | 250 | 5s | No damage | N | |
| Remark: | | | | | |

| | | | | |
|--------------|---------------------------|--------|-----------------|------------|
| 4.2.5 | TABLE: impact test | | | N/A |
| Test part | method | Result | Breakdown (Y/N) | |
| | | | N | |
| | | | N | |
| | | | N | |

| | | | |
|--------------|-------------------------|-----------|----------|
| 4.2.6 | TABLE: drop test | | P |
| Test part | Height (m) | Result | |
| Top | 1.0 | No damage | |
| Side | 1.0 | No damage | |
| Bottom | 1.0 | No damage | |

| | | | |
|-----------------------|--|----------|--------|
| 4.2.7 | TABLE: stress relief test | | N/A |
| Temperature (°C) | | Duration | Result |
| | | | |
| 4.3.6 | TABLE:DIRECT PLUG-IN EQUIPMENT-MOMENT TEST | | N/A |
| Torque (N.m) | | | |
| Remark: limit≤0.25N.m | | | |

| | | |
|--|------------------|-----|
| 4.3.8 | TABLE: Batteries | N/A |
| Battery category.....: | | |
| Manufacturer.....: | | |
| Type / model | | |
| Voltage.....: | | |
| Capacity.....: | | |
| Tested and Certified by (incl. Ref. No.).....: | | |
| Circuit.....: See below | | |

| MARKINGS AND INSTRUCTIONS (1.7.12, 1.7.15) | |
|---|--|
| Location of replaceable battery | Can't be replaceable by user. |
| Language(s): | English |
| Close to the battery | Yes |
| In the servicing instructions | Yes |
| In the operating instructions | Yes |
| The tests of 4.3.8 are applicable only when appropriate battery data is not available | Appropriate battery data is available. |
| Is it possible to install the battery in a reverse polarity position? | No |
| Temperature | Measured temperature: Ref. 4.5 |

| | Non-rechargeable batteries | | | Rechargeable batteries | | | | | |
|---|----------------------------|--------------|------------------------|------------------------|--------------|---------------|--------------|-------------------|--------------|
| | Discharging | | Unintentional charging | Charging | | Discharging | | Reversed charging | |
| | Meas. current | Manuf. spec. | | Meas. current | Manuf. spec. | Meas. current | Manuf. spec. | Meas. current | Manuf. spec. |
| Max current during normal conditions | -- | -- | -- | -- | -- | -- | -- | 1) | 1) |
| Max current during fault conditions | -- | -- | -- | -- | -- | -- | -- | 1) | 1) |
| supplementary information: | | | | | | | | | |
| 1)--Refer to table 5.3 for test results. | | | | | | | | | |
| 2) Battery polarity can't be reversed according to the design of enclosure and connector. | | | | | | | | | |

| | | |
|---|--|---------|
| Test results: | Appropriate battery data is available. | Verdict |
| - Chemical leaks | No chemical leaks affecting required insulation. | N/A |
| - Explosion of the battery | No explosion | N/A |
| - Emission of flame or expulsion of molten metal | No emission of flame or expulsion of molten metal. | N/A |
| - Electric strength test of equipment after completion of tests | Class III equipment | N/A |
| supplementary information: | | |

| 4.5.1 | TABLE: temperature rise measurements | | P |
|---------------------------------|--------------------------------------|------------------|--------------------|
| | t1 (°C).....: | See below | — |
| | t2 (°C).....: | See below | — |
| temperature rise dT of part/at: | | Normal work | required Tmax (°C) |
| | | Temperature (°C) | |
| U3 | | 31.5 | 130 |
| Inlet | | 32.8 | Ref |
| Internal wire | | 30.5 | 105 |
| Speaker | | 26.1 | Ref |
| Enclosure inside near Inlet | | 29.8 | 90 |
| Enclosure outside near Inlet | | 27.4 | 90 |
| Ambient | | 25.0 | -- |

| | | | | |
|--------------|--|-----------------------|--------------------------|------------|
| 4.5.5 | TABLE: ball pressure test of thermoplastics | | | N/A |
| | required impression diameter (mm) | Limit ≤ 2 mm | | -- |
| | part | test temperature (°C) | impression diameter (mm) | |
| | | | | |
| | | | | |

| | | | | | | |
|---|--|------------------|--------------------------------------|------------|------------|-------------|
| 5.1 | ANNEX D – TOUCH CURRENT TEST (SINGLE-PHASE; TN/TT SYSTEM) | | | | | N/A |
| Terminal A (Switch “s”) of Measuring Instrument Connected to: | Switch “e” Position | Test voltage (V) | Touch Current (mA r.m.s.) | | | |
| | | | Polarity P1/Primary Switch Condition | | | |
| | | | Normal/On | Normal/Off | Reverse/On | Reverse/Off |
| | | | | | | |

| | | | | |
|--|--|---|---------------------|-----------------------|
| 5.2 | TABLE: Electric strength tests, impulse tests and voltage surge tests | | | N/A |
| Test voltage applied between: From/To | | Voltage shape (AC, DC, impulse, surge) | Test voltage (V) | Breakdown Yes / No |
| | | | | |

| 5.3.1, 5.3.4, 5.3.7 | TABLE: component failure tests | | | | | P |
|--|--------------------------------|--------------------|-----------|------------------|--|---|
| | Ambient temperature (°C) : | | | | See below | |
| Component No. | Fault | Supply voltage (V) | Test time | Fuse current (A) | Observation | |
| U3(2-3) | s-c | 12.0V DC | 10 mins | -- | Unit shut down, no components damaged, no hazards | |
| D2 | s-c | 12.0V DC | 10 mins | -- | Unit shut down, no components damaged, no hazards | |
| C7 | s-c | 12.0V DC | 10 mins | -- | Unit shut down, no components damaged, no hazards | |
| R8 | s-c | 12.0V DC | 10 mins | -- | Unit shut down, no components damaged, no hazards | |
| Speaker | s-c | 12.0V DC | 10 mins | -- | Amplifier shut down, no components damaged, no hazards | |
| Supplementary information: | | | | | | |
| S-c = Short-circuit, O-c = Open circuit, Dis = Disconnection, O-I = Overload, o/p = output | | | | | | |

| | | | | | | | |
|---------------|---|--------------------|-----------|--------|------------------|-------------|------------|
| 5.3.7 | TABLE: POWER SUPPLY OUTPUT SHORT-CIRCUIT/OVERLOAD TEST | | | | | | N/A |
| Component No. | Fault | Supply voltage (V) | Test time | Fuse # | Fuse current (A) | Observation | |
| | | | | | | | |

ANNEX 1: Equipment list

| Code | Name | Model/Type | S/N | Calibrated date | Next Calibration Date | Manufacture |
|--------|----------------------------------|-------------|-------------------|-----------------|-----------------------|---------------------|
| TC-001 | Digital Multimeter | 34401A | MY47043456 | 2014.02.19 | 2015.02.18 | agilent |
| TC-004 | Push/pull gauge | NK-500 | 2Q10060932 | 2014.02.19 | 2015.02.18 | |
| TC-005 | Electronic weight | DSI-861 | 198692 | 2014.02.19 | 2015.02.18 | shangdeli |
| TC-006 | Insulation resistance tester | CS2676CX | 1107032-009 | 2014.02.19 | 2015.02.18 | changshen |
| TC-007 | Earthing resistance tester | YD2668-4B | 4B-2307 | 2014.02.19 | 2015.02.18 | Yangzi |
| TC-008 | HI-pot/Insulation tester | CS2672C | 1108006-002 | 2014.02.19 | 2015.02.18 | changshen |
| TC-010 | AC Voltage Regulator | TDGC2J | | 2014.02.19 | 2015.02.18 | SAKO |
| TC-013 | AC power source | HPA-3110 | 3513 | 2014.02.19 | 2015.02.18 | Henqiang |
| TC-014 | Temperature/Humidity chamber | SDJ-80L | SDJ-80J | 2014.02.19 | 2015.02.18 | Shenzhen hongjian |
| TC-015 | Electric oven | HK45AS | F11011008 | 2014.02.19 | 2015.02.18 | Guangzhou KENTON |
| TC-017 | AC digital power meter | PF9901 | YG100731N11070075 | 2014.02.19 | 2015.02.18 | Yuanfang |
| TC-022 | Leakage current tester | 228 | 10-866030 | 2014.02.19 | 2015.02.18 | simpson |
| TC-023 | Oscilloscope | TDS1012C-SC | C013300 | 2014.02.20 | 2015.02.19 | tektronix |
| TC-024 | Tape measure | DK-2041 | | 2014.02.22 | 2015.02.21 | Proskit |
| TC-025 | Stop watch | TA-228 | | 2014.02.20 | 2015.02.19 | KTJ |
| TC-026 | Data acquisition/switch unit | 34970A | MY44057668 | 2014.02.23 | 2015.02.22 | Agilent |
| TC-027 | Temperature/humidity meter | VC230 | | 2014.02.20 | 2015.02.19 | VICTOR |
| TC-028 | Torque drive | 3RTD | 435850B | 2013.05.14 | 2014.05.13 | TOHNICHI |
| TC-033 | Test finger | ZLT-I02 | I021203 | 2014.02.22 | 2015.02.21 | Guangzhou zhilitong |
| TC-034 | Test pin | ZLT-I09 | I091201 | 2014.02.22 | 2015.02.21 | Guangzhou zhilitong |
| TC-038 | Test apparatus of the mains plug | ZLT-LJ2 | LJ011202 | 2014.02.19 | 2015.02.18 | Guangzhou zhilitong |
| TC-039 | Ball pressure apparatus | ZLT-QY1 | Q011202 | 2014.02.20 | 2015.02.19 | Guangzhou zhilitong |
| TC-040 | Impact hammer | ZLT-CJ1 | LJ011206 | 2014.02.20 | 2015.02.19 | Guangzhou zhilitong |

| | | | | | | |
|----------|-----------------------------|------------|------------|------------|------------|---------------------|
| TC-041 | Impact hammer | ZLT-CJ1 | LJ011205 | 2014.02.20 | 2015.02.19 | Guangzhou zhilitong |
| TC-042 | Caliper rule | CD-6 " CSX | 500-196-20 | 2013.07.04 | 2014.07.03 | MITUTOYO |
| TC-044 | Glow wire tester | ZRS-2 | 12121304 | 2013.12.16 | 2014.12.15 | Guangzhou Xinna |
| TC-045 | Needle flame tester | ZY-2 | 12121311 | 2013.12.16 | 2014.12.15 | Guangzhou Xinna |
| TC-107 | "Van der Hoofden" test head | EMF827 | R21SW | 2013.12.16 | 2014.12.15 | Shenzhen HLKS |
| TC-107-a | Measurement receiver | EMF827-a | R21SW | 2013.12.16 | 2014.12.15 | Shenzhen HLKS |

ANNEX 2: Photo-documentation

Photo 1

- ☒ general
- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal



Photo 2

- ☐ front
- ☒ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal



Photo 3

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☒ internal



Photo 4

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☒ internal


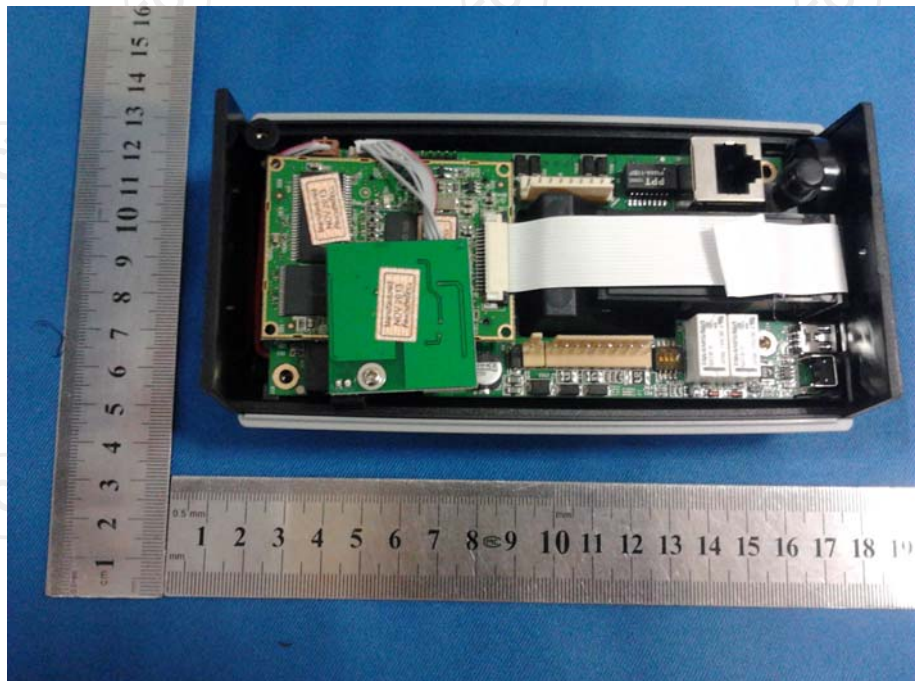


Photo 5

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☒ internal

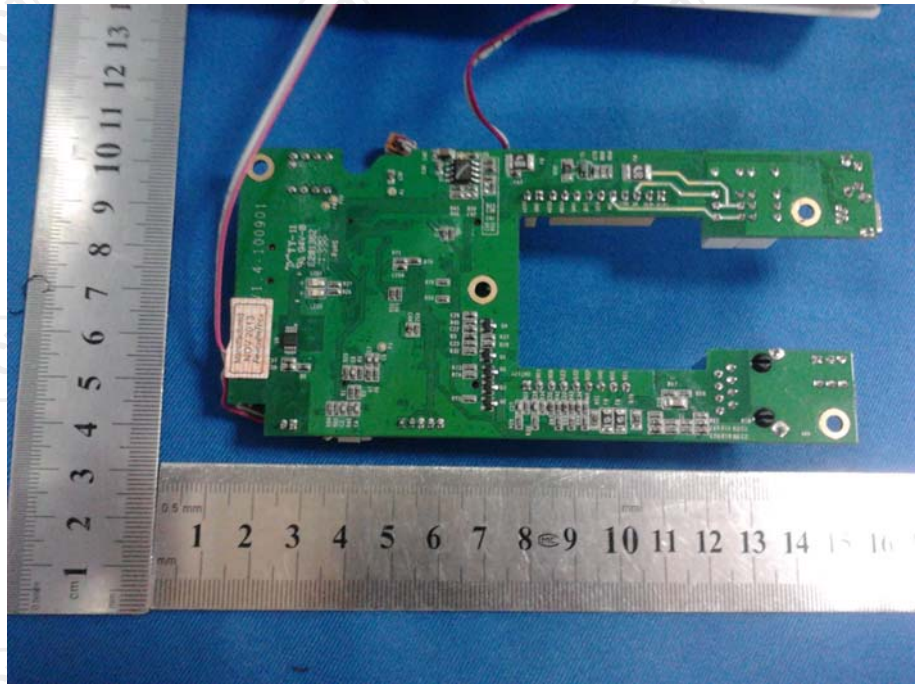

End of Test Report